
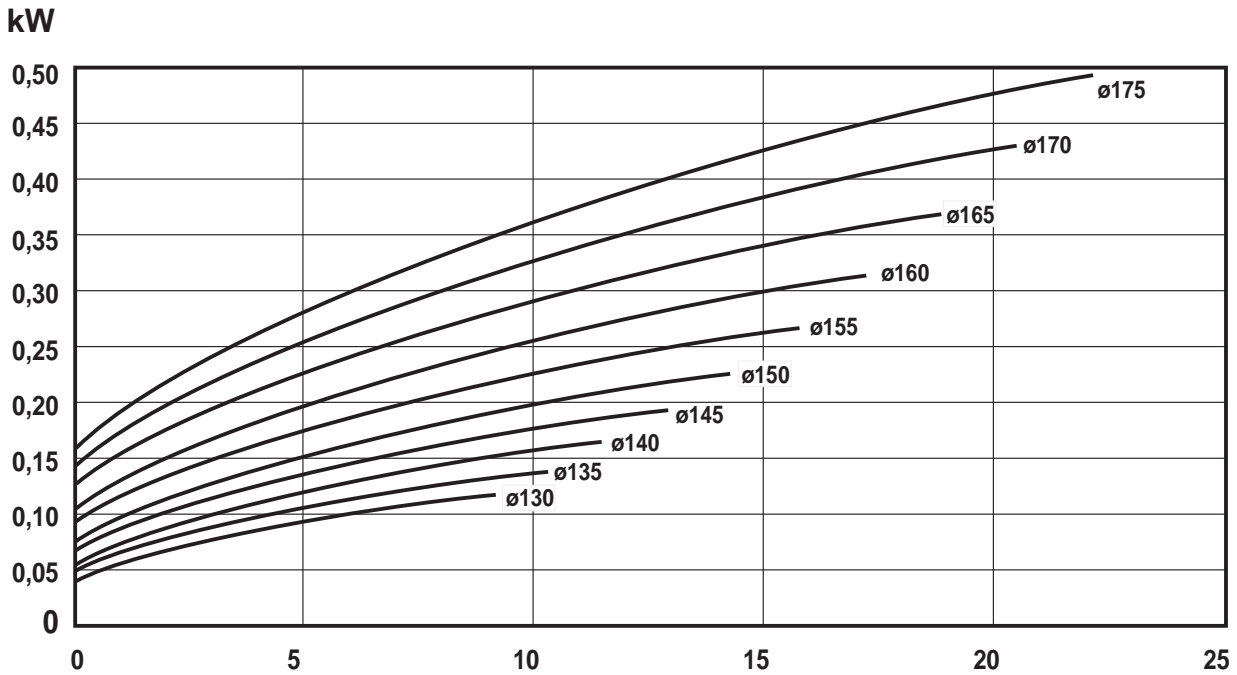


NOTE: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Low flow impeller  
 Speed:  $n=1450^{-1}$  50 Hz  
 Impeller: Max. dia 175 mm  
 Min. dia 130 mm  
 Pump inlet: 63,5 mm  
 Pump outlet: 51 mm

Performance data refer to water at 20°C  
 Permissible tolerance  $\pm 5\%$


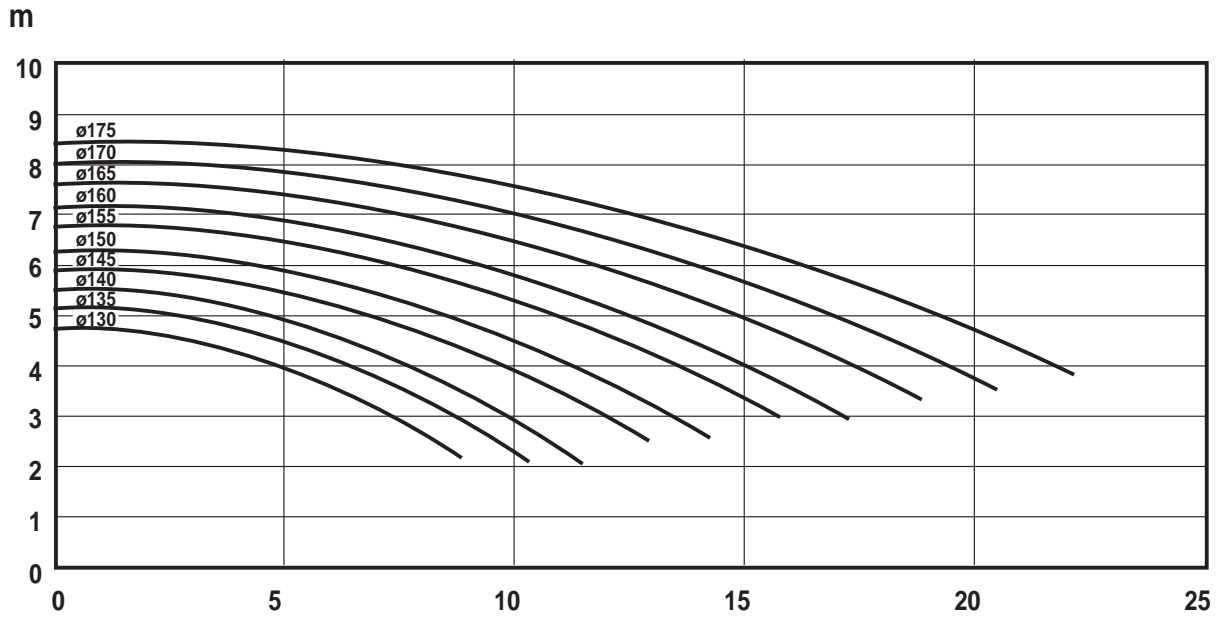


Flow m³/h

NOTE: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Low flow impeller  
 Speed: **n=2900<sup>-1</sup> 50 Hz**  
 Impeller: **Max. dia 175 mm**  
           **Min. dia 130 mm**  
 Pump inlet: **63,5 mm**  
 Pump outlet: **51 mm**

Performance data refer to water at 20°C  
 Permissible tolerance ±5%

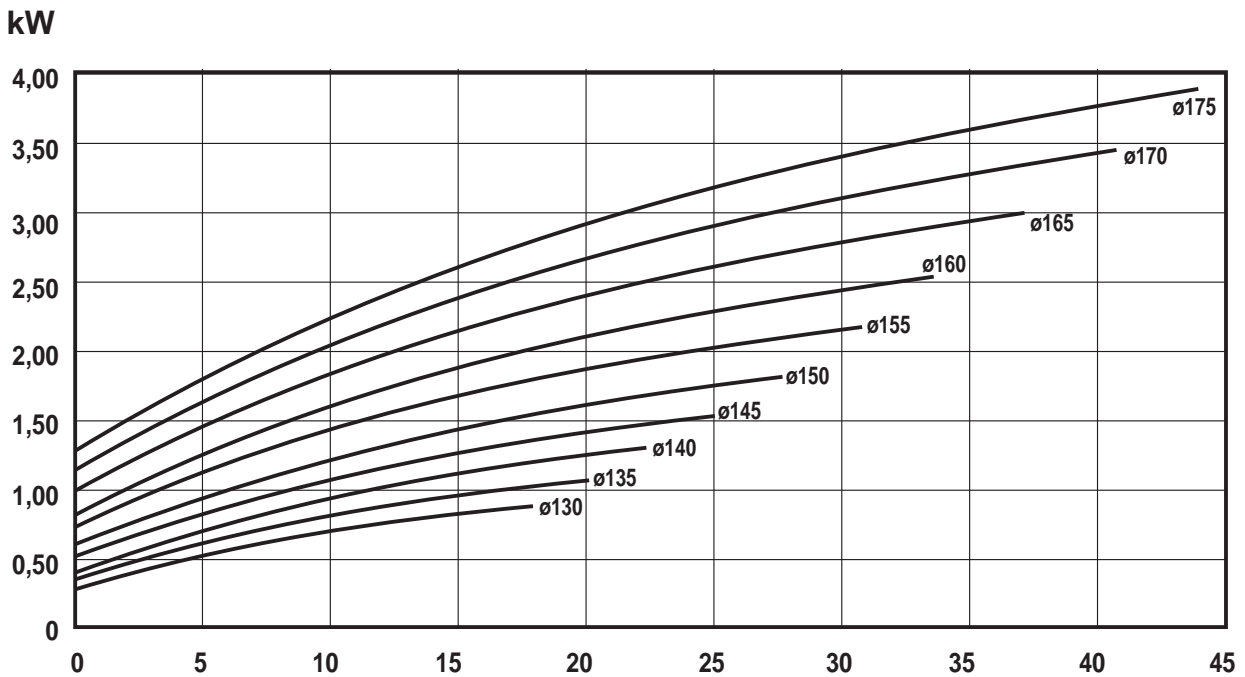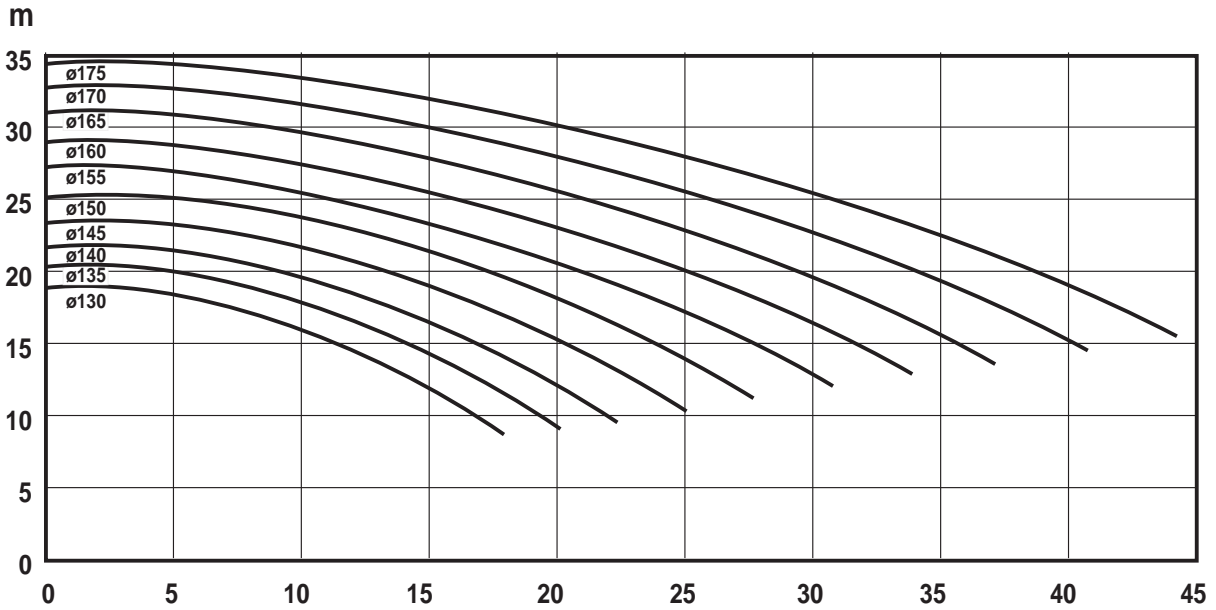

Flow m<sup>3</sup>/h

453401 ISS U 10.08


NOTE: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Low flow impeller


Speed: **n=1750<sup>-1</sup> 60 Hz**  
 Impeller: **Max. dia 175 mm**  
           **Min. dia 130 mm**  
 Pump inlet: **63,5 mm**  
 Pump outlet: **51 mm**

Performance data refer to water at 20°C  
 Permissible tolerance ±5%

m

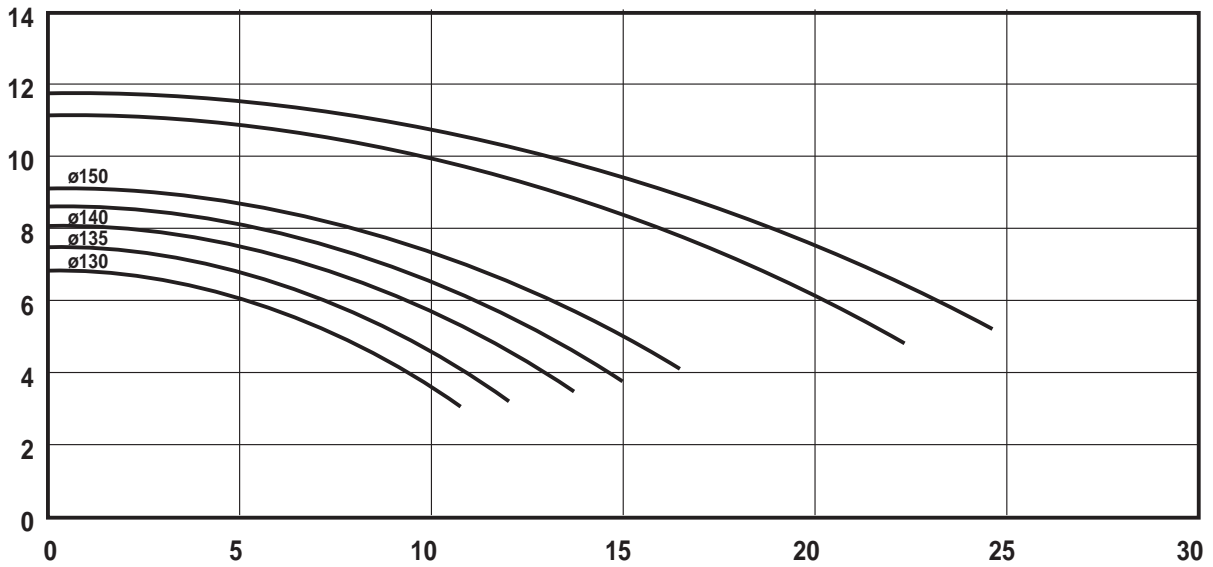

kW


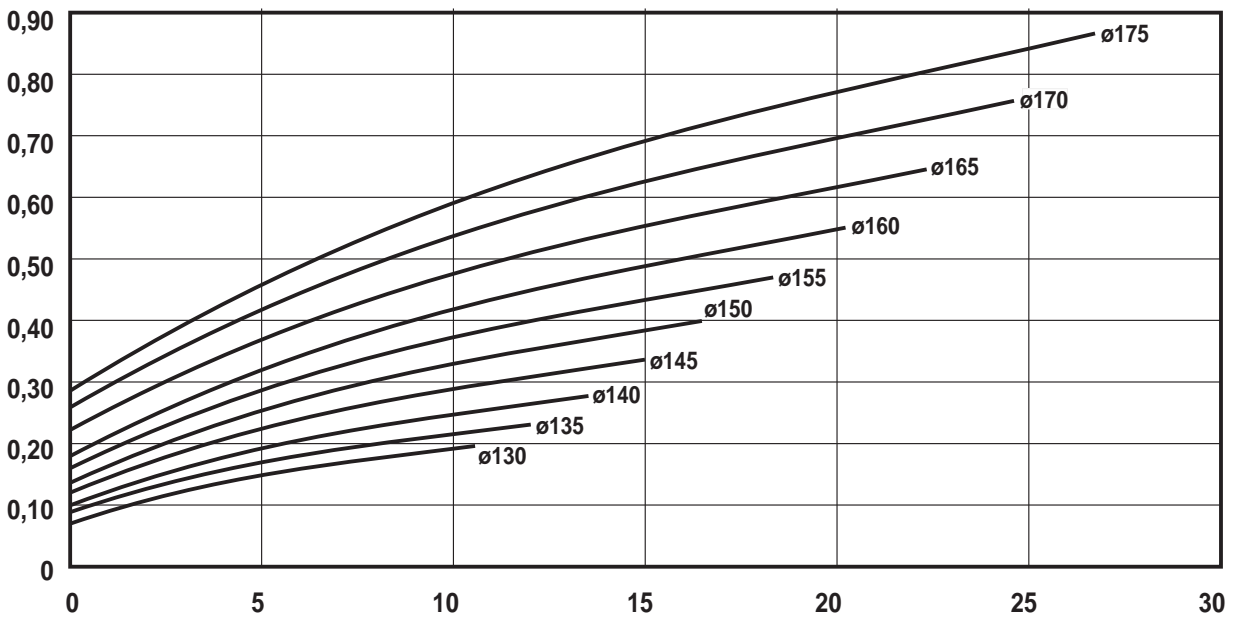


Flow m<sup>3</sup>/h

NOTE: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Low flow impeller  
Speed: **n=3500<sup>-1</sup> 60 Hz**  
Impeller: **Max. dia 175 mm**  
**Min. dia 130 mm**  
Pump inlet: **63,5 mm**  
Pump outlet: **51 mm**

Performance data refer to water at 20°C  
Permissible tolerance ±5%

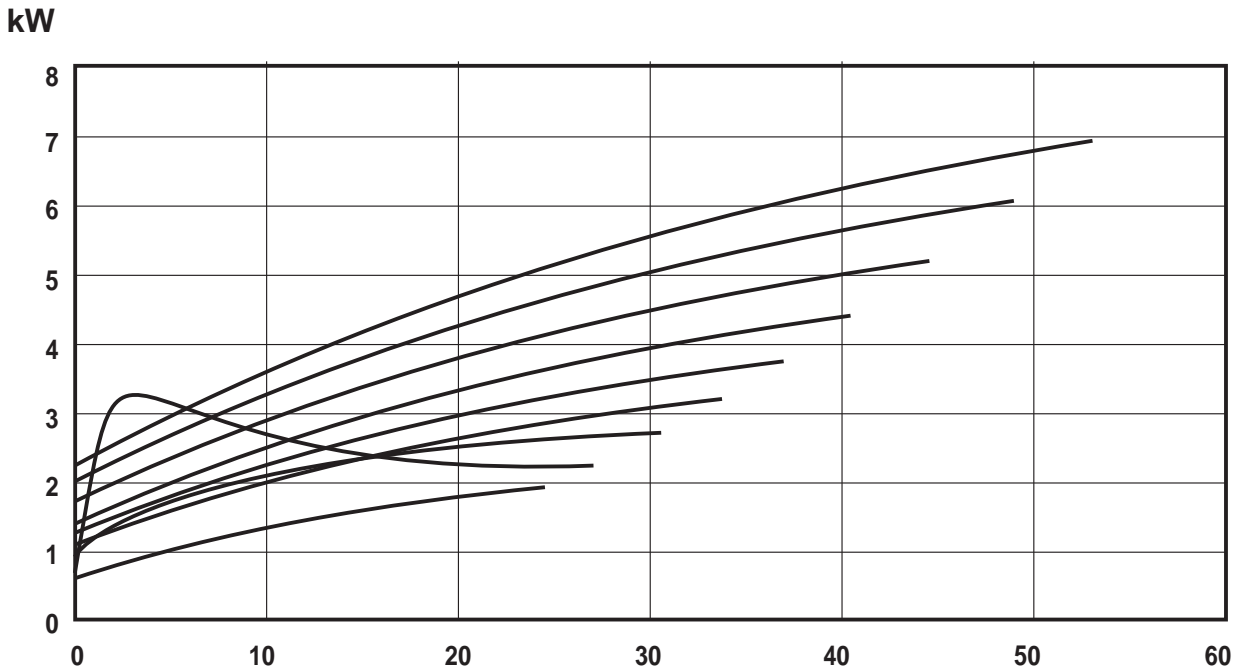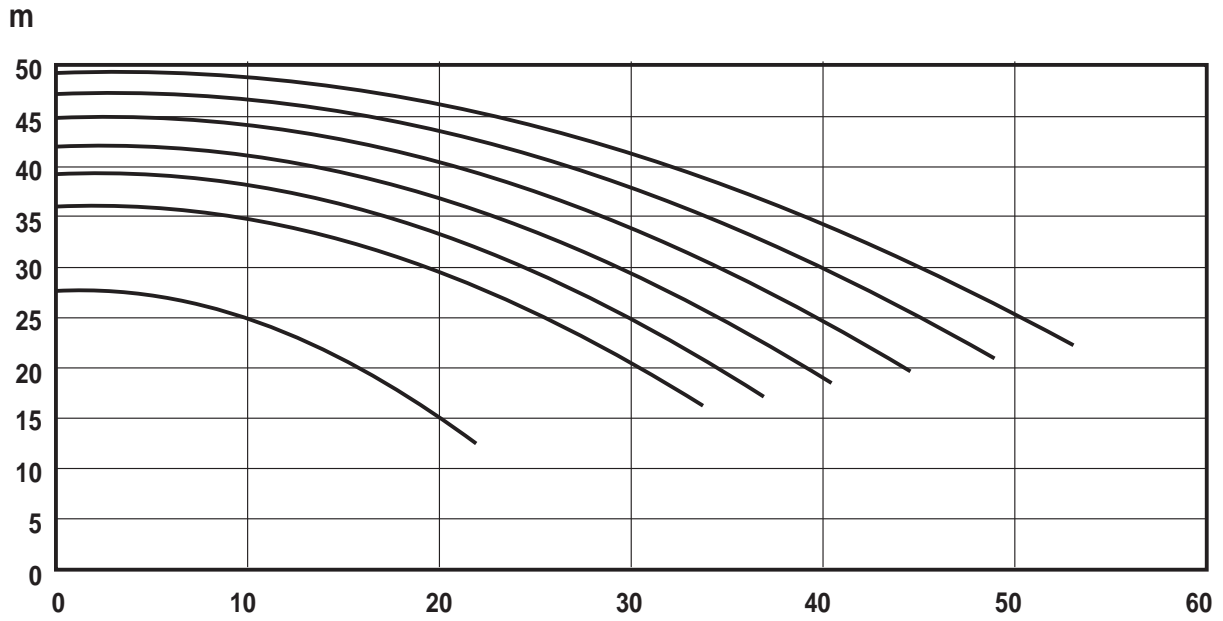

Flow m<sup>3</sup>/h